


**HAP | AIR DRIVEN PUMPS - GENERAL DUTY HIGH FLOW**


**Working pressure 10000 psi**

**Two stage operation**

**Choice of 2.64 or 6.6 gallons oil reservoir**

- ▶ Driven by a powerful 4.08 kW rotary air motor with a maximum air consumption of 84.75 cubic feet per minute at 100 psi inlet air pressure
- ▶ Choice of 2, 3 or 4-way manual control valves with load holding feature on 3 & 4-way versions
- ▶ Externally adjustable pressure relief valve for pressure setting up to a maximum of 10000 psi
- ▶ Cable management features for cable/hose winding and stowage
- ▶ Supplied as standard with pressure gauge FRL unit and a robust roll frame

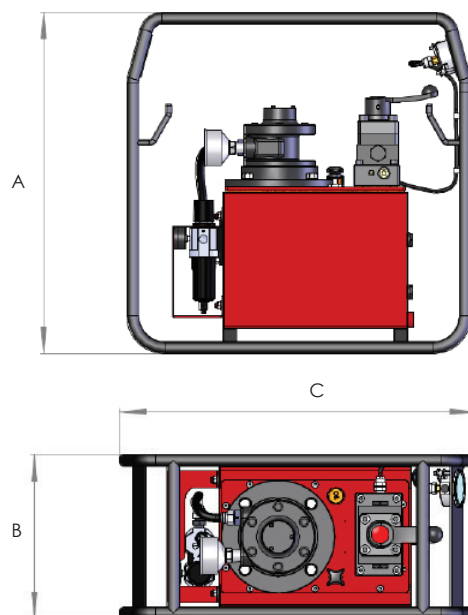

Model number	Valve type	Oil capacity (gallons)	Maximum flow rate (in <sup>3</sup> /min)		Weight (lbs)	Dimensions (in)		
			1 <sup>st</sup> stage	2 <sup>nd</sup> stage		A	B	C
HAP21011	P-T Plate	2.64	610.24	79.33	102.5	24.7	11.5	24.9
HAP21012	P-T Plate	6.6	610.24	79.33	137.8	24.7	13.87	29.71
HAP21021	2-way	2.64	610.24	79.33	103.6	24.7	11.5	24.9
HAP21022	2-way	6.6	610.24	79.33	138.9	24.7	13.87	29.71
HAP21031	3-way	2.64	610.24	79.33	103.6	24.7	11.5	24.9
HAP21032	3-way	6.6	610.24	79.33	138.9	24.7	13.87	29.71
HAP21041	4-way	2.64	610.24	79.33	103.6	24.7	11.5	24.9
HAP21042	4-way	6.6	610.24	79.33	138.9	24.7	13.87	29.71